



AM Series PROFESSIONAL MOVING SYSTEMS






AM-1203

The AM1203 subwoofer is an active system with three channel amplifier, it 500W for the LF and 2x200W for the full range, each channel can be adjusted separately, and volume control, with limit and frequency control, phase reversion, line Input output parallel and unparallel. MIC Input, fan for better cooling and protect function for reliable operation. This bass is working with AM102 passive full range speaker. AD12-3 system is a fully new design for the clients, with good protection for transportation and combination for the whole systems. With is small and compact size, and very perfect sound, the system is very good for outdoor performing, Bars, Moving DJ, Small party, and for recording.

SPECIFICATIONS

Frequency range	: 60 Hz-20 KHz(±3dB)
Rated power	: 400 W(LOW)/180Wx2(Md/Hi) RMS
Program power	: 800 W(LOW)/360Wx2(Mid/Hi)
Components	: 12 " Low+10"Mid+1.3 " Hi
Sensitivity (1 W/m)	: 95 dB
Rated Maximum SPL	: 120dB peak,@1m
Dispersion(VxH)	: 50°/100°
Input Impedance	: 20 KΩ
Input Sensitivity	: 0.775v
Input Mic	: ≤ 50mv
Output Power	: 500W +200W+200W
Distortion	: <0.05%
Damping Factor	: ≥400
Power Connector	: Power Con
Operating Voltage	: 220v, 50Hz
Colour	: Black
Weight	: 65.5 Kg
Shipping Size	: 0.32 CBM/PC
Dimensions(WxDxH)	: 954x381x610 mm

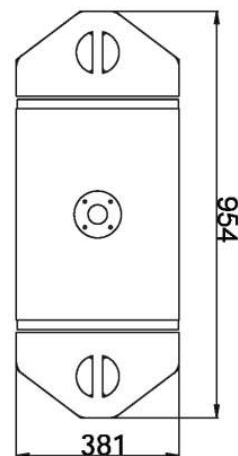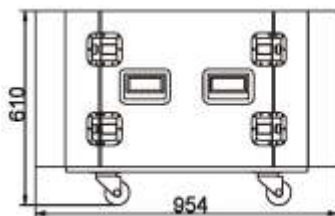

Specifications are subject to change without prior notice for future improvement

Copyright of intelligent electronic's © 2012